



Manual for service and maintenance

Review of app, battery, placement of bait
and change of co2 cylinder

 **AUROCON**
Automated Rodent Control

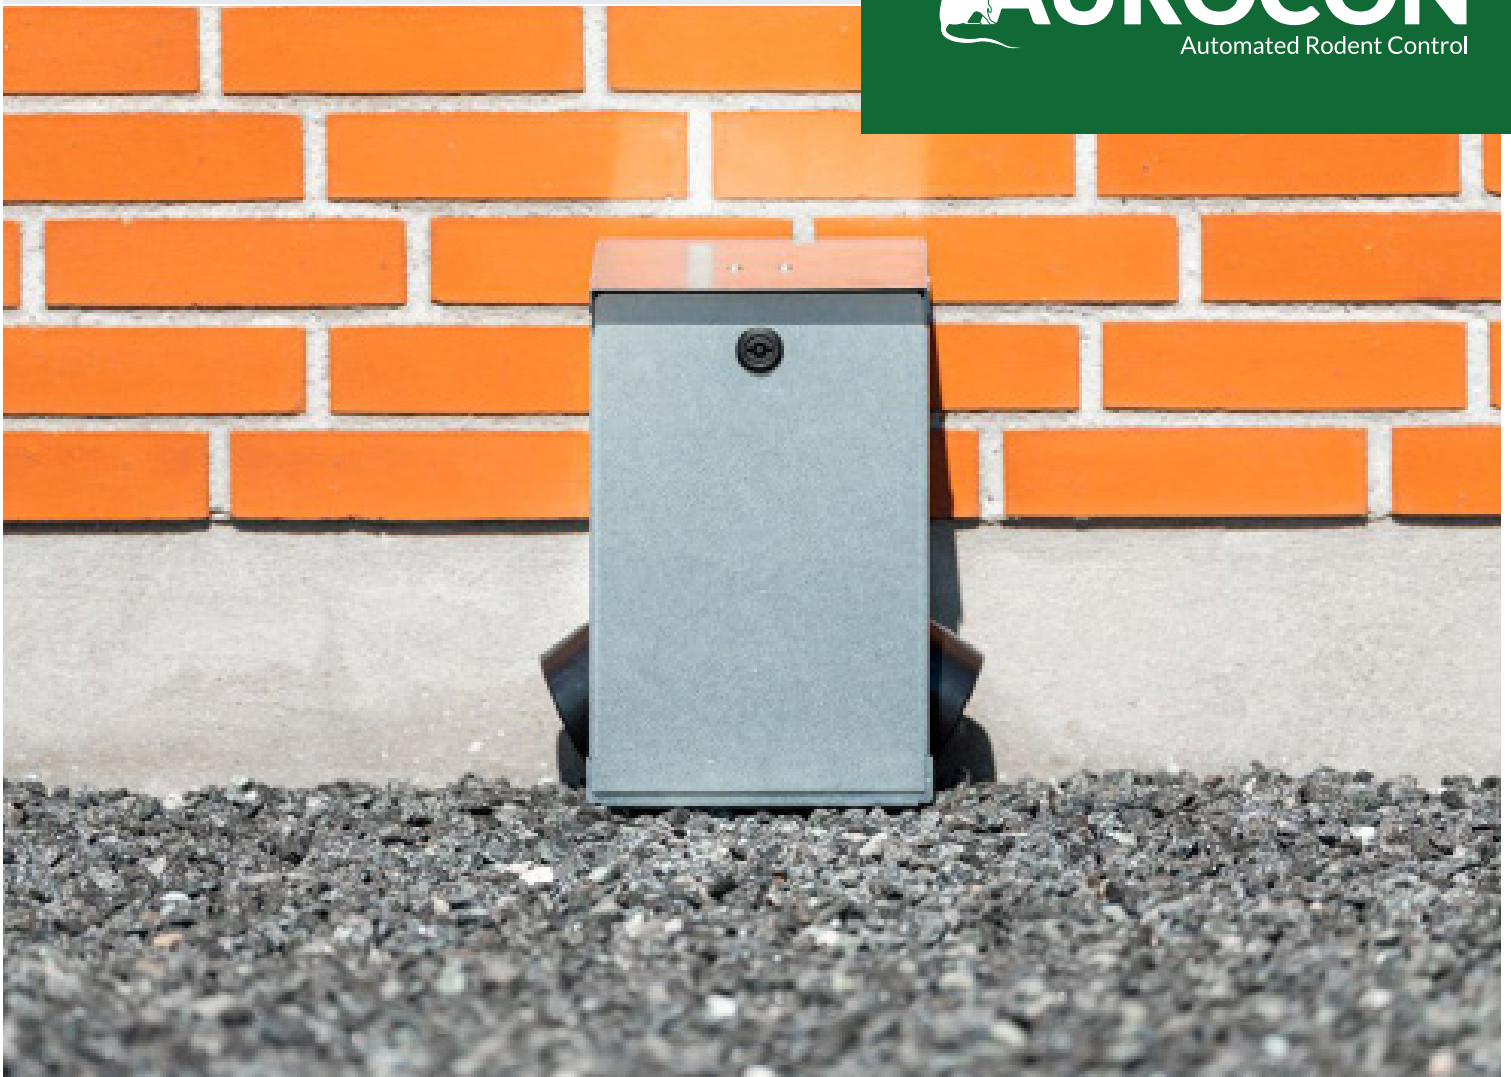

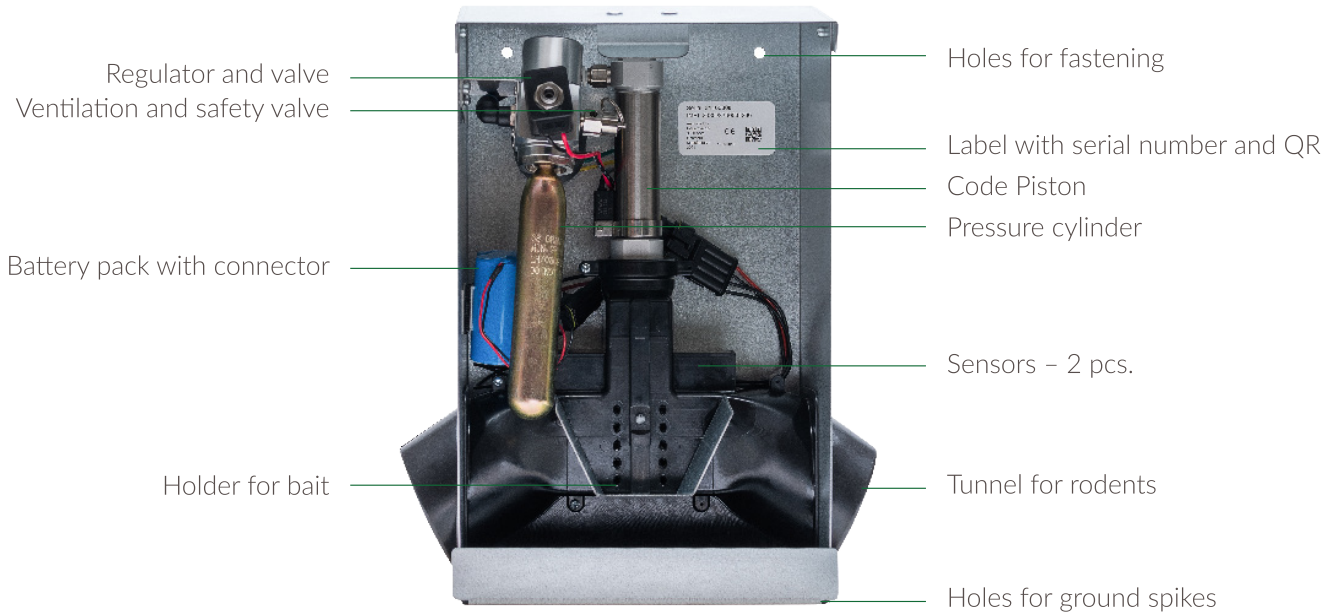

Installation/start-up of trap:

- Open trap
- Attach the trap using holes
- Holes for ground spikes
- Mount pressure cylinder. Tighten without overtightening and screw it in quickly to avoid wasting CO²
- Place bait
- Attach battery pack with Velcro and connect connector. After about 60 seconds, the trap's killing mechanism is activated
- Open the app and QR code for device, see next page

If you have any doubts about the network coverage of the traps, you can check it here:

Six fox – trap with antenna:

<https://coverage.iotdk.dk>

or scan the QR code with your camera


Narrow – trap without antenna:

<https://www.telenor.dk/erhverv/kundeservice/drift-og-dakning/dakning/dakningskort>

or scan the QR code with your camera


NOTE!

- The trap should be placed on the ground, out of reach of children and fastened using holes.
- Always wear gloves when handling the device and touch only the components needed for servicing (pressure cylinder, battery pack and holder, and bait block).
- Be aware that the pressure cylinder can become very cold when emptied and can cause frostbite. Therefore, only handle the pressure cylinder when it has thawed.
- CE marking is only valid when correctly inserted and serviced according to the user manual.
- **NEVER PUT YOUR FINGERS IN THE PIPE!**
- If dirt needs to be removed, the trap must be switched off, and a bottle brush can be used.

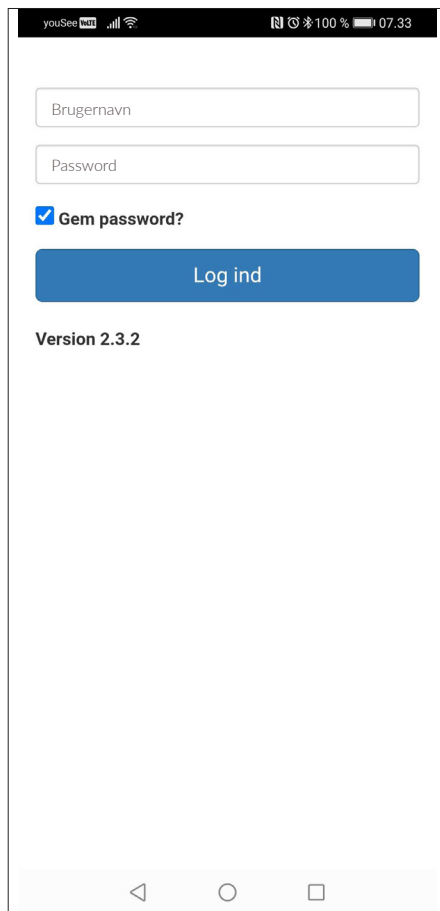

Log in

Enter the information in the fields and click on "Log ind" (Log in)

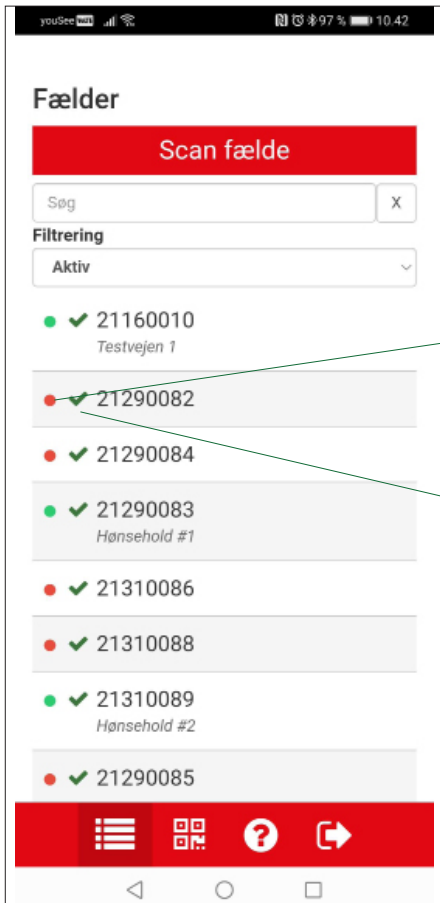

Traps/list view

This list shows the traps assigned to each technician contact internally.

Select the trap to be serviced.

When the trap is displayed, scroll down to the bottom and click on Service step - see next page.

● Activated ● Disabled

● CO2 alarm


- 50-69 slag/kills brugt
- +70 slag/kills brugt

⚠ Warning - all other alarms

✓ All okay

Service

When the trap appears, scroll down to the bottom and click on "Servicetrin" (Service Step).

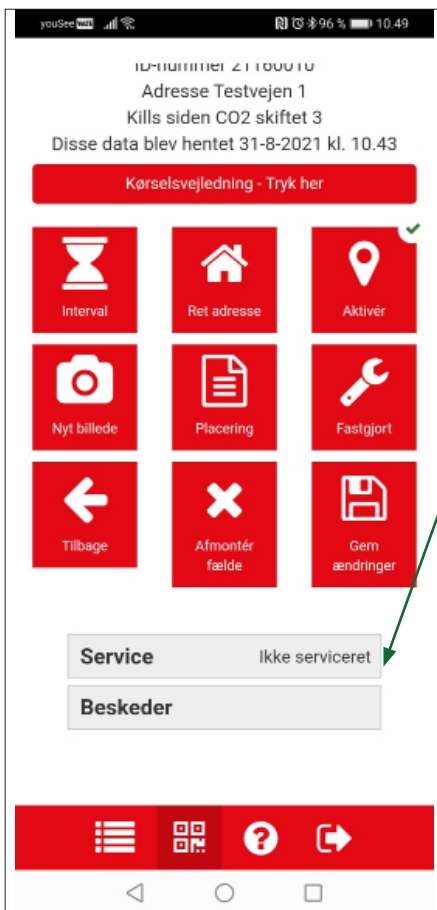

Perform service


Take a picture if relevant.

Click "Yes" at each point in the list as tasks are completed

Decide whether the trap is dismantled or put back down.

Note any comments in the field at the bottom.

On the following pages, see how to change out pressure cylinders and batteries and how to place the bait.

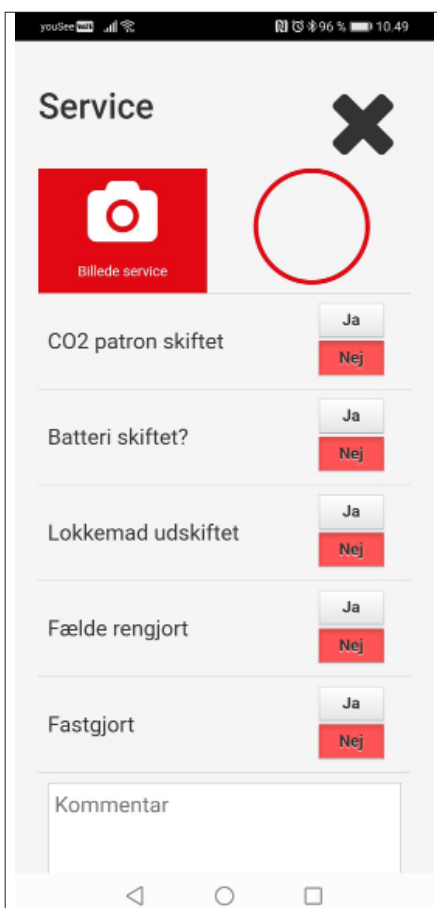

Replace pressure cylinder

1. Empty the pressure cylinder through the safety valve: gently pull the ring with fingers or using a screwdriver or a pair of pliers.




2. Remove the cartridge after it has thawed and screw on a new one.



Placing of new bait

The bait is placed in the holder.

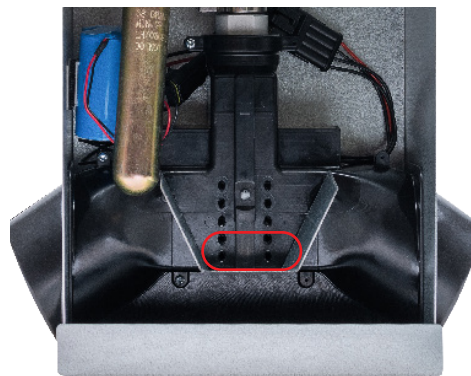

Replace battery

1. The battery is attached with the help of Velcro and is therefore simply pulled off.



2. Disconnect connectors.



3. A battery is connected.



4. Connect connectors.
After about 60 seconds, the trap's killing mechanism is activated.





Test by putting a stick through the pipe.

Service

Finally, scroll to the bottom of the service menu and click on “Gem” (Save)

The service report is now created and available in Ratélcom’s web platform

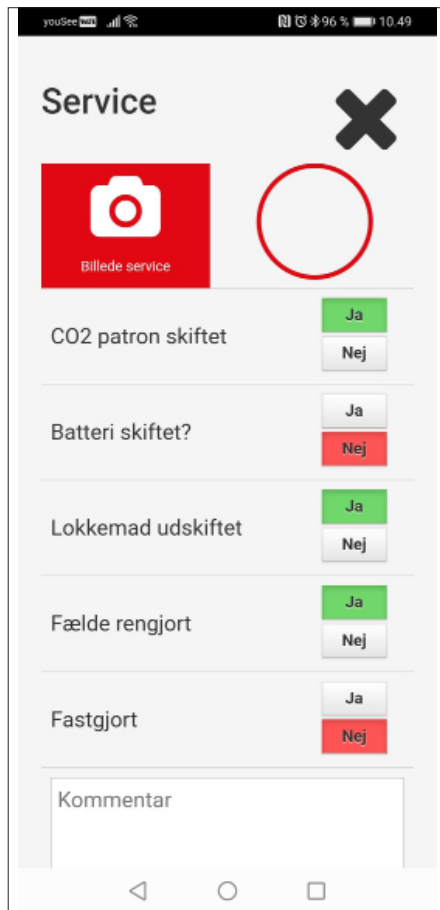

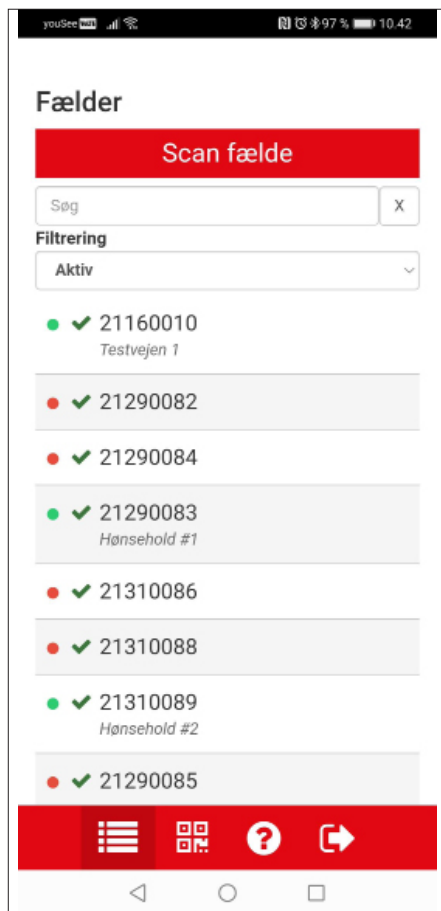

Traps/list view

Go back to the trap overview to select the next trap

For further changes of location, settings, etc.
– see Installation Manual.

For further information, please visit www.AuroTrap.com